

TAYLON

SKYLIGHTS

INDUSTRIAL SKYLIGHT FIBERGLASS



DIAMOND SERIES

EXPERIENCE
PERFORMANCE
LUMINOCITY



ENHANCING WAREHOUSE SAFETY AND SUSTAINABILITY WITH FIRE PROTECTION FOR YOUR WAREHOUSE



BRIGHTER

STRONGER

STREAMLINED

Technical Specifications

INDUSTRIAL SKYLIGHT FIBERGLASS

Model: ISFBG

Performance Grade: 40

Impact rated 800 lbs.

Wind Speed Rate at 126 MPH

Combustion Classification: CC1 Polycarbonate

Light weight design = 45 lbs.

VLT 80%, SHGC 0.58, 100% Diffusion

Features:

Diamond series dome design to improve strength
light collection

High performance and Impact resistant
polycarbonate dome by Palram

Superior light transmission, 80% VLT, Haze, 100%
Diffusion

Exceeds UL 972 impact standards

Class IV hail rated Diamond Series dome

Curb mount

Architectural grade 6063 T5 aluminum frame with
50-year silicone seal,
Santoprene sonic gasket with a 55 durometer, ROHS
compliant

Exceeds National Roofing Standards


Available Options:

Dual glazed

Self-flashing base

IR resistance options to reduce SHGC

MAXAIR Venting Base

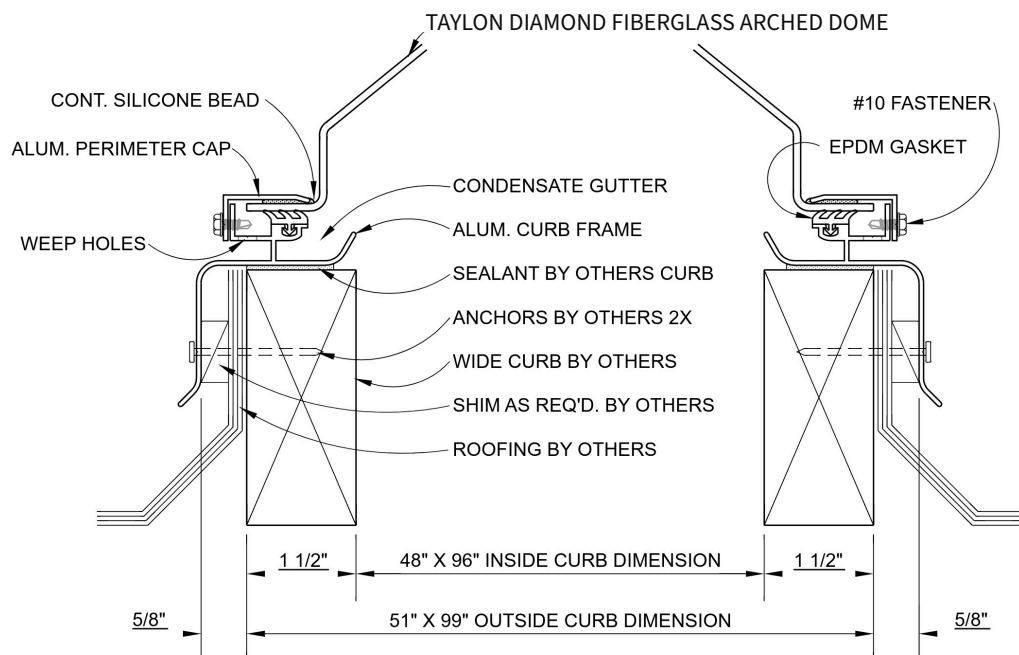

Model Size	Inside Curb Dimensions	Outside Curb Dimensions
4848	48" x 48"	51" x 51"
4872	48" x 72"	51" x 75"
4896	48" x 96"	51" x 91"
6072	60" x 72"	63" x 75"

*More standard sizes and custom sizes are available

INTEGRATED VENTILATION

NATURAL DAYLIGHTING SOLUTIONS FOR YOUR WAREHOUSE

949-550-1010

TAYLONSKYLIGHTS.COM

2111 SOUTH ANNE STREET
SANTA ANNA, CA 92704



TAYLON
SKYLIGHTS