

TAYLON

SKYLIGHTS

UL SMOKE VENT

TANDEM



DIAMOND SERIES

EXPERIENCE
PERFORMANCE
LUMINOCITY



ENHANCING WAREHOUSE SAFETY AND SUSTAINABILITY WITH FIRE PROTECTION FOR YOUR WAREHOUSE




BRIGHTER

STRONGER

STREAMLINED

Technical Specifications

UL SMOKE VENT TANDEM
Model: ULSVTND
UL Number: E533253
Complies with UL 793
Meets California & International Fires codes
Impact rated 1,000 lbs.
Meets Roof Class :90
Wind Speed Rate at 130 MPH
Rated: 10-PSF
Combustion Classification: CC1 Polycarbonate
Meets: NFPA204
Light weight design = TBD on Sizing
VLT 80%, SHGC 0.58, 100% Diffusion

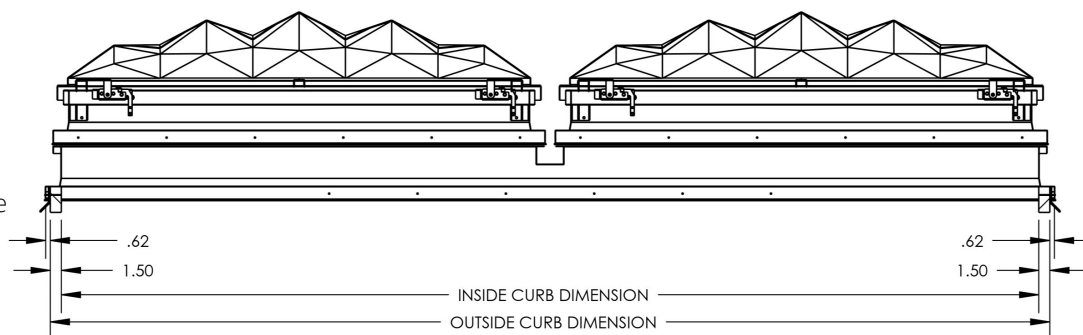

Available Options:

Dual Glazed
Metal Lids
Curb Mount or Self Flashing Models
Fusible Link Options 165, 212, 286, 370, 520

MAXAIR Venting base,
Standard with integrated rain shield, Bird screen,
Insect screen, Dust Filter
11 SQFT of ventilation

30 PSF UL Rated unit also available

Model Size	Inside Curb Dimensions	Outside Curb Dimensions
Custom Size Upon Order	Custom Upon Order	Custom Upon Order

INTEGRATED FIRE PROTECTION
NATURAL DAYLIGHTING SOLUTIONS FOR YOUR WAREHOUSE

949-550-1010
TAYLONSKYLIGHTS.COM
2111 SOUTH ANNE STREET
SANTA ANNA, CA 92704



TAYLON
SKYLIGHTS