

# TAYLON

## SKYLIGHTS

### INDUSTRIAL SKYLIGHT POLYCARBONATE DUAL GLAZED



### ***DIAMOND SERIES***

EXPERIENCE  
PERFORMANCE  
LUMINOCITY



# ENHANCING WAREHOUSE SAFETY AND SUSTAINABILITY WITH FIRE PROTECTION FOR YOUR WAREHOUSE



**BRIGHTER**

**STRONGER**

**STREAMLINED**

## Technical Specifications

INDUSTRIAL SKYLIGHT POLYCARBONATE DUAL GLAZE

Model: ISP2

ICC-ES Number: ESR-5273

Performance Grade: 40

Impact rated 800 lbs.

Wind Speed Rate at 126 MPH

Combustion Classification: CC1 Polycarbonate

Light weight design = 71 lbs.

VLT 80%, SHGC 0.58, 100% Diffusion

## Features:

Diamond series dome design to improve strength and light collection

High performance and Impact resistant polycarbonate dome by Palram

Superior light transmission, 80% VLT, Haze, 100% Diffusion

Exceeds UL 972 impact standards

Class IV hail rated Diamond Series dome

Curb mount

Architectural grade 6063 T5 aluminum frame with 50-year silicone seal, Santoprene sonic gasket with a 55 durometer, ROHS compliant


Exceeds National Roofing Standards

## Available Options:

Self-flashing base

IR resistance options to reduce SHGC

MAXAIR Venting Base

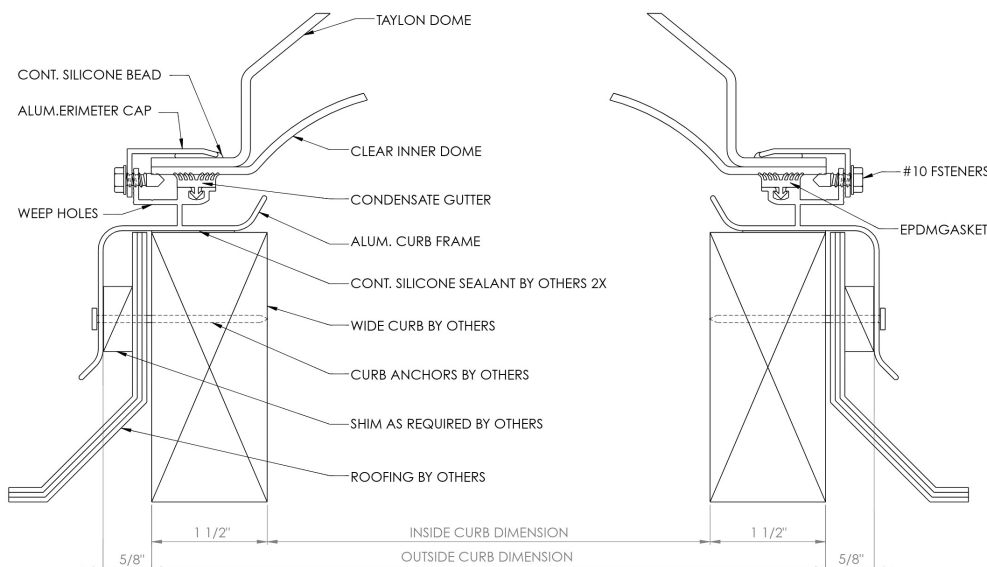

| Model Size | Inside Curb Dimensions | Outside Curb Dimensions |
|------------|------------------------|-------------------------|
| 4848       | 48" x 48"              | 51" x 51"               |
| 4872       | 48" x 72"              | 51" x 75"               |
| 4896       | 48" x 96"              | 51" x 91"               |
| 6072       | 60" x 72"              | 63" x 75"               |

\*More standard sizes and custom sizes are available

## INTEGRATED VENTILATION

**NATURAL DAYLIGHTING SOLUTIONS FOR YOUR WAREHOUSE**

949-550-1010

TAYLONSKYLIGHTS.COM

2111 SOUTH ANNE STREET  
SANTA ANNA, CA 92704



**TAYLON**  
SKYLIGHTS